


Fixture Type: _____
 Type: _____
 Project: _____
 Location: _____

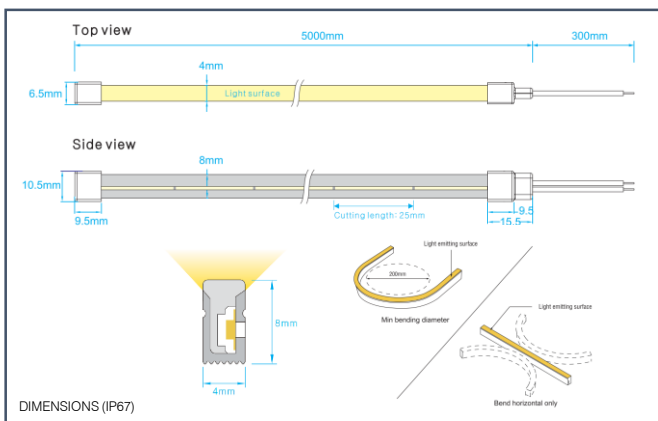

TECHNICAL SPECIFICATION


Our Laser Primo LED Tape Light offers different types of light output of our standard tape. Our lowest output version offers 68lm and consumes only 2W per foot. With a very low profile, it offers an excellent solutions for your LED linear lighting needs. It is great for all applications, including cover lighting, cabinetry, millwork, stairs and many other alternatives. for use in cove lighting,

SPECIFICATIONS

- Power: 2W p/ft
- Input: DC 24 VAC
- CCT: 2100K, 2400K, 2600K, 3000K, 4200K, 5300K
- CRI: 90+
- LED Source: 68lm p/ft
- Beam Angle: 120°
- Life 54,000 Hours (L70)
- Cutable every 4"
- Dimming Options: Depends on Driver
- Colors: White
- Standards: ETL, cETL, Damp and Wet Location Listed




ACCESSORY

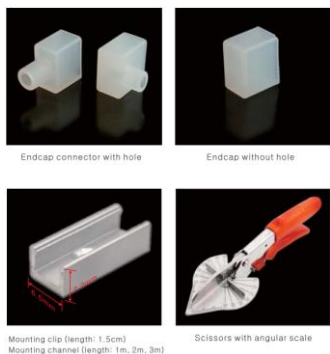

DISTRIBUTION

Polar curve (The data base on 6W 3000K)

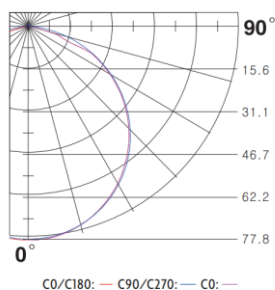

1. Tape Type

GMPM = LED Tape (68lm p/f)

2. Length

100 = 100 FT *
25 = 25 FT
10 = 10 FT
XX = Custom

3. Color Temperature

21 = 2100K
24 = 2400K
26 = 2600K
30 = 3000K
35 = 3500K
42 = 4200K
53 = 5300K

4. Rating:

IP20 Indoor
IP52 Damp
IP65H Wet
IP65 Wet
IP67 Wet
IP67E/IP68 Wet / Submersible

* IP20 Only

Example: **GMPM-25-30-IP20**