


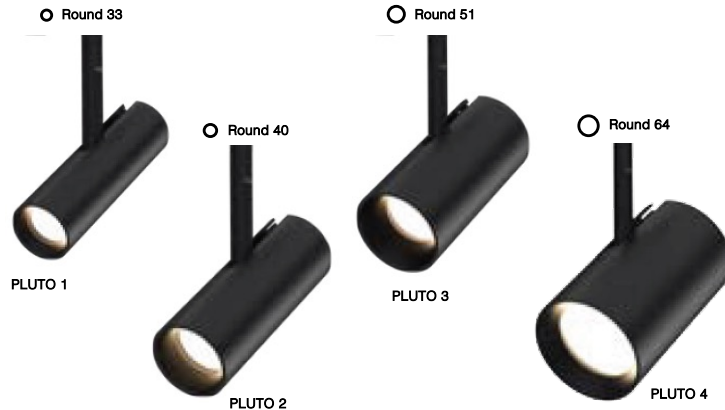


TECHNICAL SPECIFICATION

A powerful small spot that clips mechanically into Orbita track system. Designed for mini track systems, it combines sleek aesthetics with precise light control, making it ideal for displays and premium retail spaces. Can be mounted on ceiling or wall vertically or horizontally.

SPECIFICATIONS

- Construction: Die-cast Aluminum
- Optics: PMMA Lens
- Power: PL1-6W / PL2-7W / PL3-10W / PL4-14W
- Input: 48 VDC
- CCT: 2700K/3000K/3500K/4000K
- CRI: 90+
- LED Source: From 617lm to 1776lm
- Beam Angle: 15°/24°/38°/50° (Lens)
- Dimming Options: TRIAC / 0-10V
- Colors: Black/ White
- Reflector: Black/ White
- Standards: ETL, cETL, Damp Location Listed



PL1	PL2
PL3	PL4

FINISHES


Fixture: Black White

FINISHES – CUSTOM FINISHES*




*Ask Factory


ACCESORY

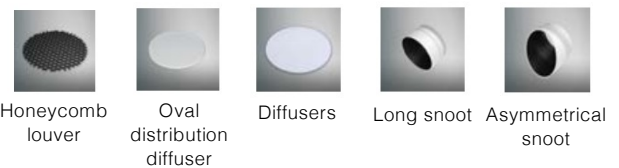

OPTICS

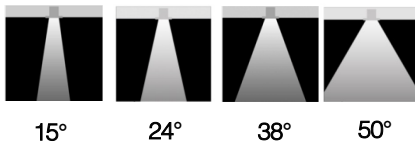

CCT



1. Trim Type

- ☐ **PL1** = Pluto 1 (617lm)
☐ **PL2** = Pluto 2 (707lm)
☐ **PL3** = Pluto 3 (1047lm)
☐ **PL4** = Pluto 4 (1776lm)

2. Color Temperature

- ☐ **27** = 2700K
☐ **30** = 3000K
☐ **35** = 3500K
☐ **40** = 4000K

3. Optic

- ☐ **NS** = 15°
☐ **S** = 24°
☐ **M** = 38°
☐ **W** = 50°

4. Finish

- ☐ **W** = White
☐ **B** = Black
 For other finishes contact factory

5. Dimming

- ☐ **TRIAC / 0-10V*** = BLANK

* Dimming Protocols Available on the Remote Power Supply



Example: **PL1-30-NS-B** = PLUTO 1 - 3000K – 15° Optic – Black Finish